


9 Next, baste all the pinned seams and remove the pins. Machine together, always using the notches as a guideline. Press. Leave the cover wrong side out. For the scallops measure out 10 cm diameter circles along bottom hem, and mark. Draw a straight line halfway through circles and cut out.



10 Open out one side of the bias binding and pin and baste to the wrong side of the raw edges of the scallops. Machine down, taking in little pleats where there is excess fabric on the binding.



11 Turn binding over and wrap over raw edges of the scallops. Hand-hem neatly on to right side of fabric.

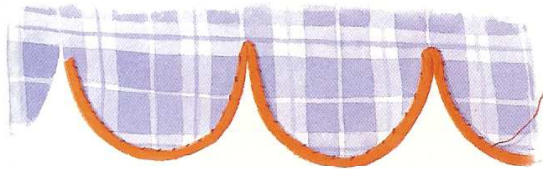

12 Turn the cover right-side out. Cut six lengths of bias binding of 25 cm each and machine down the two open edges to stop it opening out. Hand-sew pairs of ties to the insides of the pleat at the back.



13 Knot the ends of the binding ties to prevent them from fraying. Tie in the bows once the cover is on the chair.

